


### ESSENTIAL L24

Ø 90 cm | 35,43"  
H 90 cm | 35,43"


24 spot led 72W - 4000°K - 12 Vdc - 6720 lm  
life time 30.000 hrs - SMD type 5630 - Dimmable: yes

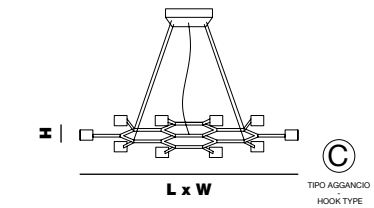

### ESSENTIAL grid

L x W 128 x 90 cm | 50,39" x 35,43"  
H 6 cm | 2,36"


12 spot led 36W - 4000°K - 12 Vdc - 3360 lm  
life time 30.000 hrs - SMD type 5630 - Dimmable: yes

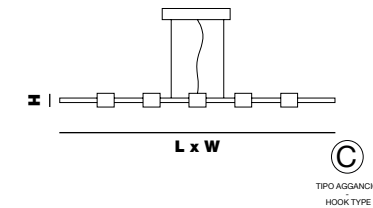

### ESSENTIAL linear

L x W 122 x 8 cm | 48,03" x 3,15"  
H 6 cm | 2,36"


5 spot led 15W - 4000°K - 12 Vdc - 1400 lm  
life time 30.000 hrs - SMD type 5630 - Dimmable: yes

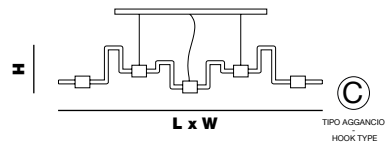

### ESSENTIAL creativity

L x W 135 x 8 cm | 53,15" x 3,15"  
H 22 cm | 8,66"


5 spot led 15W - 4000°K - 12 Vdc - 1400 lm  
life time 30.000 hrs - SMD type 5630 - Dimmable: yes



**A**

Altezza - Height  
MIN 18 cm - 7.08"

Aggancio con rosone e tirante in metallo;  
altezza regolabile (A) - Hook with ceiling cup  
and metal cab; adjustable height (A)



**C**

Altezza - Height  
MIN 24 cm - 9.44"

Aggancio con rosone e tiranti per  
sospensioni. Altezza regolabile (C)  
Hook with ceiling cup and metal cables for  
suspension. Adjustable height (C)

# essential


## Studio in Project

## Particolari - Details

Sospensioni realizzate artigianalmente su disegno. Boccole portaled in ferro tornite. Boccole raccordo in ottone. È possibile richiedere differenti misure, numero di led e configurazioni. Non esitate a contattarci per un progetto esclusivo che si adatti al meglio ai vostri spazi e soddisfi le vostre esigenze.

The suspensions are realized handmade on our drawing Turned iron led holder bushings. Brass connecting bushings. It is possible to request different sizes, number of LEDs and configurations. Do not hesitate to contact us for an exclusive project that best suits your spaces and meets your needs.

## Metalli - Metals

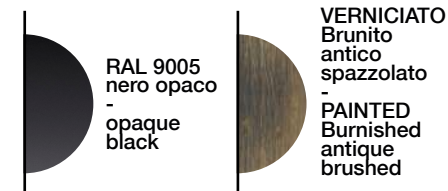

## Plexiglass



Opalino  
Opal



Guarda il video

-

Watch video

\* Specifiche agganci - Info on hooks pag. 345 \*

\* Altre finiture e colori su richiesta - Other finishes and colors on request - see pag. 347-348 \*